


ENAMEL PLUS HIRI FLOW


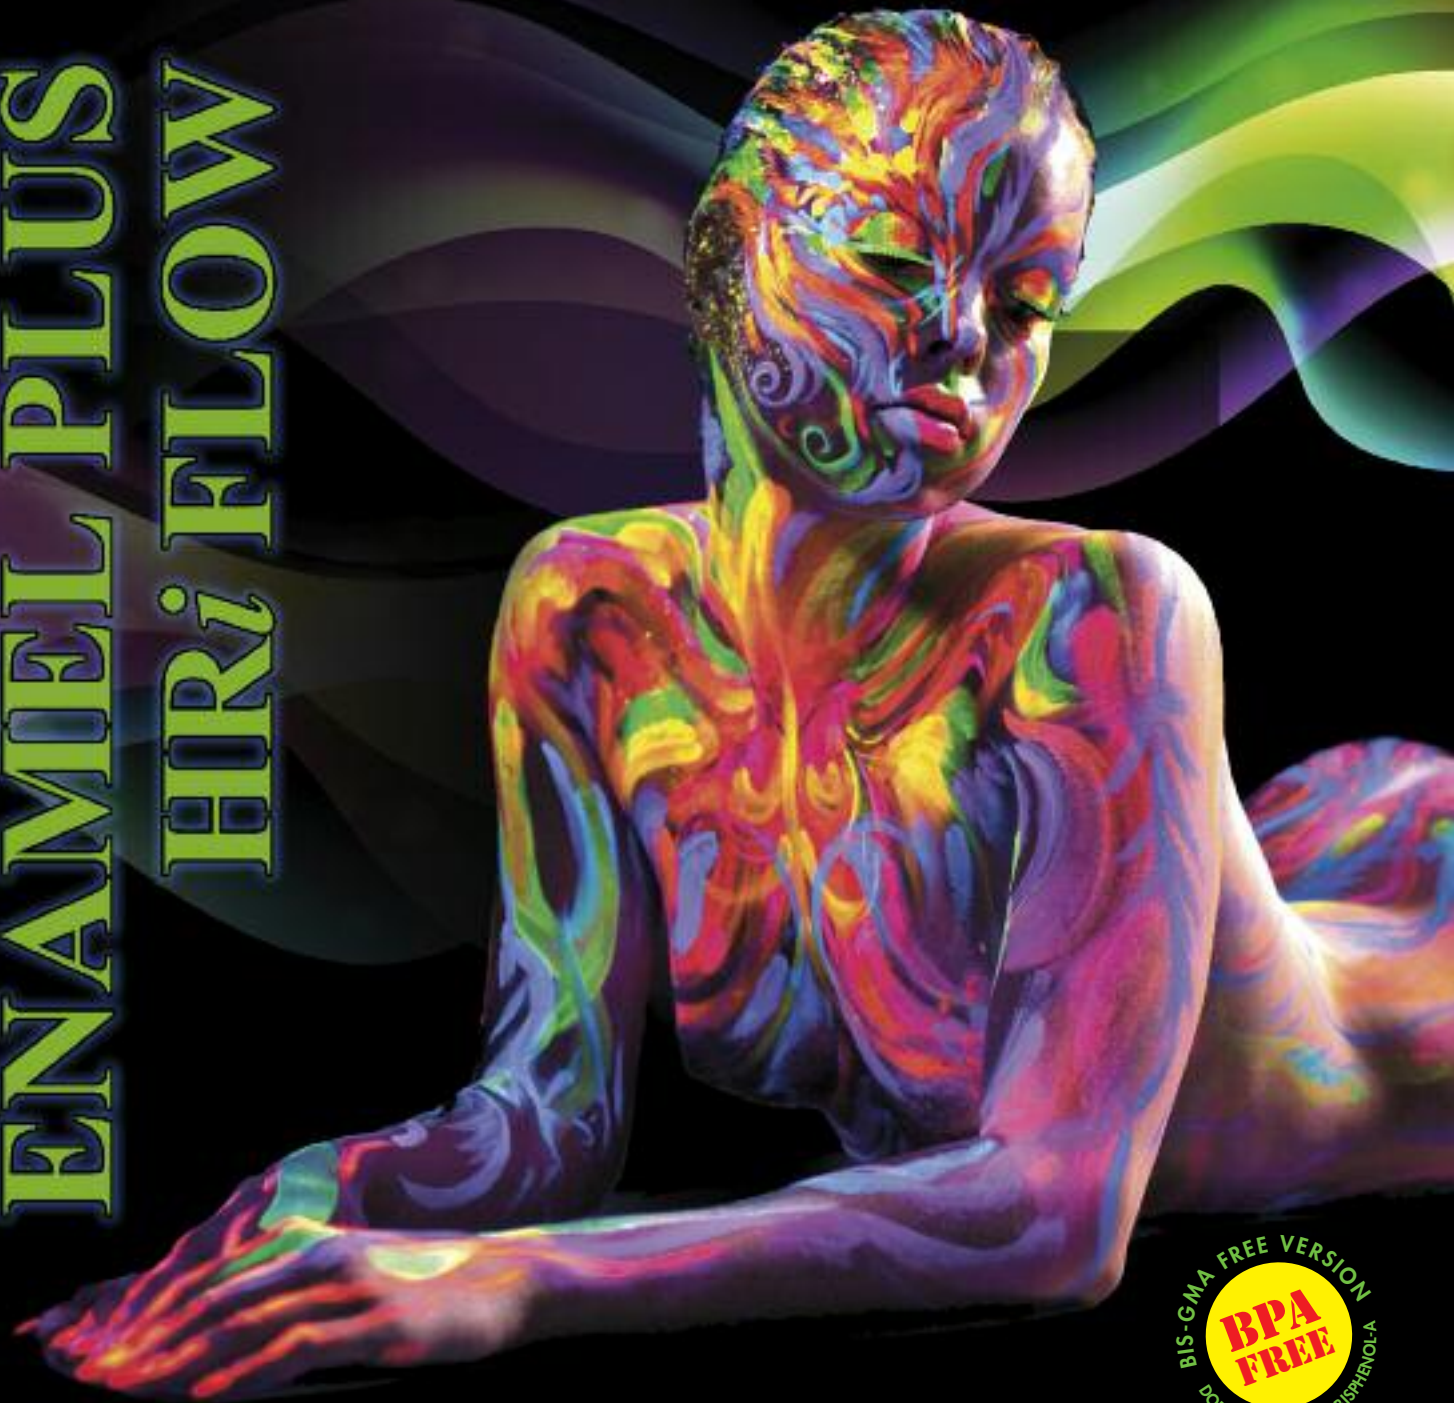


BIS-GMA FREE VERSION
**BPA
FREE**
DOES NOT CONTAIN BISPHENOL-A

ENAMEL  HRi Flow^{HF}
plus

NO BUBBLES

Higher Elasticity

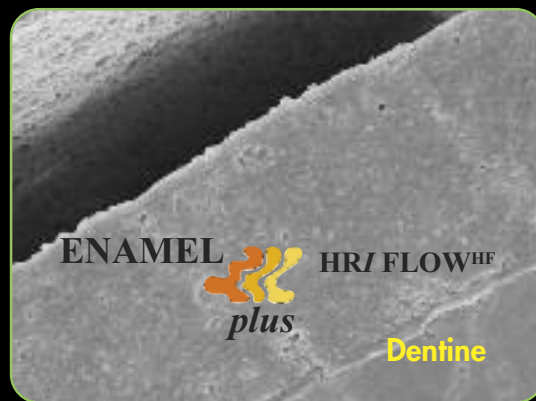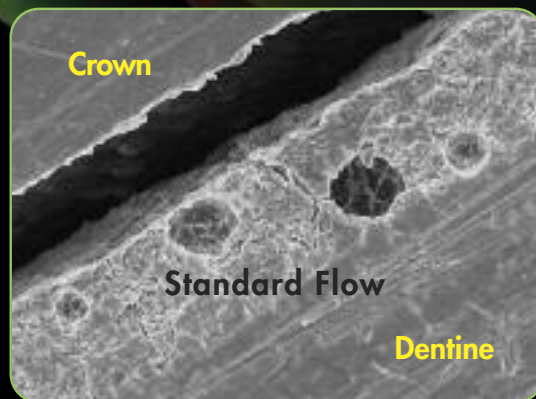

ANALYSIS UNDER MAGNIFICATION

ENAMEL HRi Flow^{HF} plus

PHYSICAL CHARACTERISTICS

	FILLER%	VICKERS HARDNESS MPa	YOUNG MODULUS MPa	FLEXURAL STRENGTH MPa	COMPRESSIVE STRENGTH MPa	RADIOPACITY
HRi "Flow HF"	77	770	13485	148	394	210% Al
Standard Flow	55	350	6000	120	350	30% Al

- Highly Filled
- Highly Fluorescent
- Higher Viscosity
- Higher Elasticity
- Higher Radiopacity
- High Physical Properties
- No bubbles

Highly Fluorescent



Material to be used as cavity liner in posteriors for direct and indirect restorations and in anteriors for class V build up.

ENAMEL HRi Flow^{HF} plus



COMPLETE KIT

CHR2F

ENAMEL PLUS HRi FLOW

UD0, UD0,5, UD1 (A1), UD2 (A2)

UD3 (A3), UD3,5 (A3,5), UD4, UD5, UD6

Plexiglass holder

9 x 2 g



MINI KIT

CHR5F

ENAMEL PLUS HRi FLOW

UD1 (A1), UD2 (A2)

UD3 (A3), UD3,5 (A3,5), UD4

5 x 2 g



Micerium S.p.A.
Via G. Marconi, 83-16036 Avegno (GE) Italy
Tel. +39 0185 7887 880 • Fax +39 0185 7887 970
hfo@micerium.it • www.micerium.com

File: Enamel plus HRi Flow ING v1.0_10-2013

estetica 
GRUPPO
MICERIUM